

<<< [Back to Oerlikon Leybold Vacuum GmbH](#)


**Cold Heads and Helium Compressors (Short List):**

**Single Stage Cold Head COOLPOWER 140T**



Typical Application:

- Cooling of high temperature superconductors
- High cooling capacity

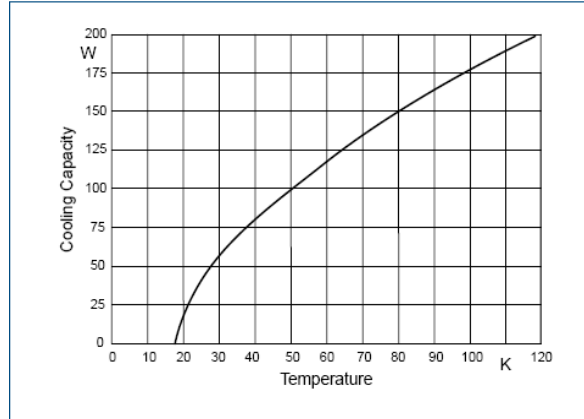


Typical refrigerating capacity of the cold head COOLPOWER 140 T

**Dual Stage Cold Head COOLPOWER 5/100**




Typical Application:

- Cooling of superconducting magnets in nuclear magnetic resonance tomographs

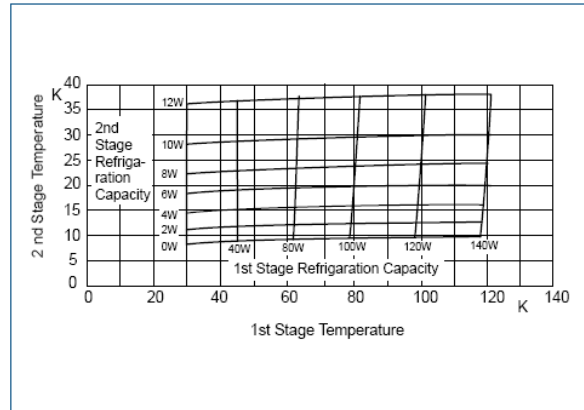

Typical refrigerating capacity of the cold head COOLPOWER 5/100

**Dual Stage Cold Head COOLPOWER 10MD (Mechanical driven)**

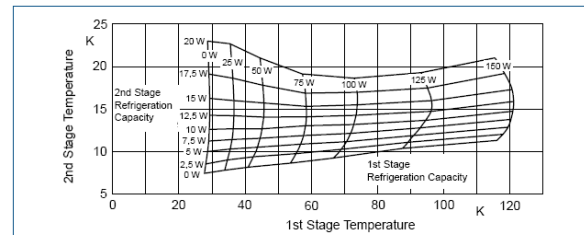

Typical refrigerating capacity of the cold head COOLPOWER 10 MD

Typical Application:

- Cooling of superconducting magnets in nuclear magnetic resonance tomographs (particular shield cooling)

Helium Compressor CP6000



Electrical Power Consumption: 6kW

Typical Application

- COOLPOWER 140T
- COOLPOWER 5/100
- COOLPOWER 10MD

Helium Compressor CP2000



Electrical Power Consumption: 2kW

Typical Application

- Small Cold Heads

<<< [Back to Oerlikon Leybold Vacuum GmbH](#)